



TTLock

F6

Smarter Solutions For Your Home.



Product Overview



Front Body
24.5(D)x69(W)x161(H)mm




Back Body
24.5(D)x69(W)x156(H)mm

Specification

Door Thickness	Applicable range 35-50mm
Backset	60 / 70 mm
Pin Code	150 Groups
RFID Card	1000 pcs
Fingerprint	100 Groups
Battery	4X1.5V AA alkaline batteries
Operation Temp	-10-55°C
Operation Humidity	20%-93%RH

Product Dimensions

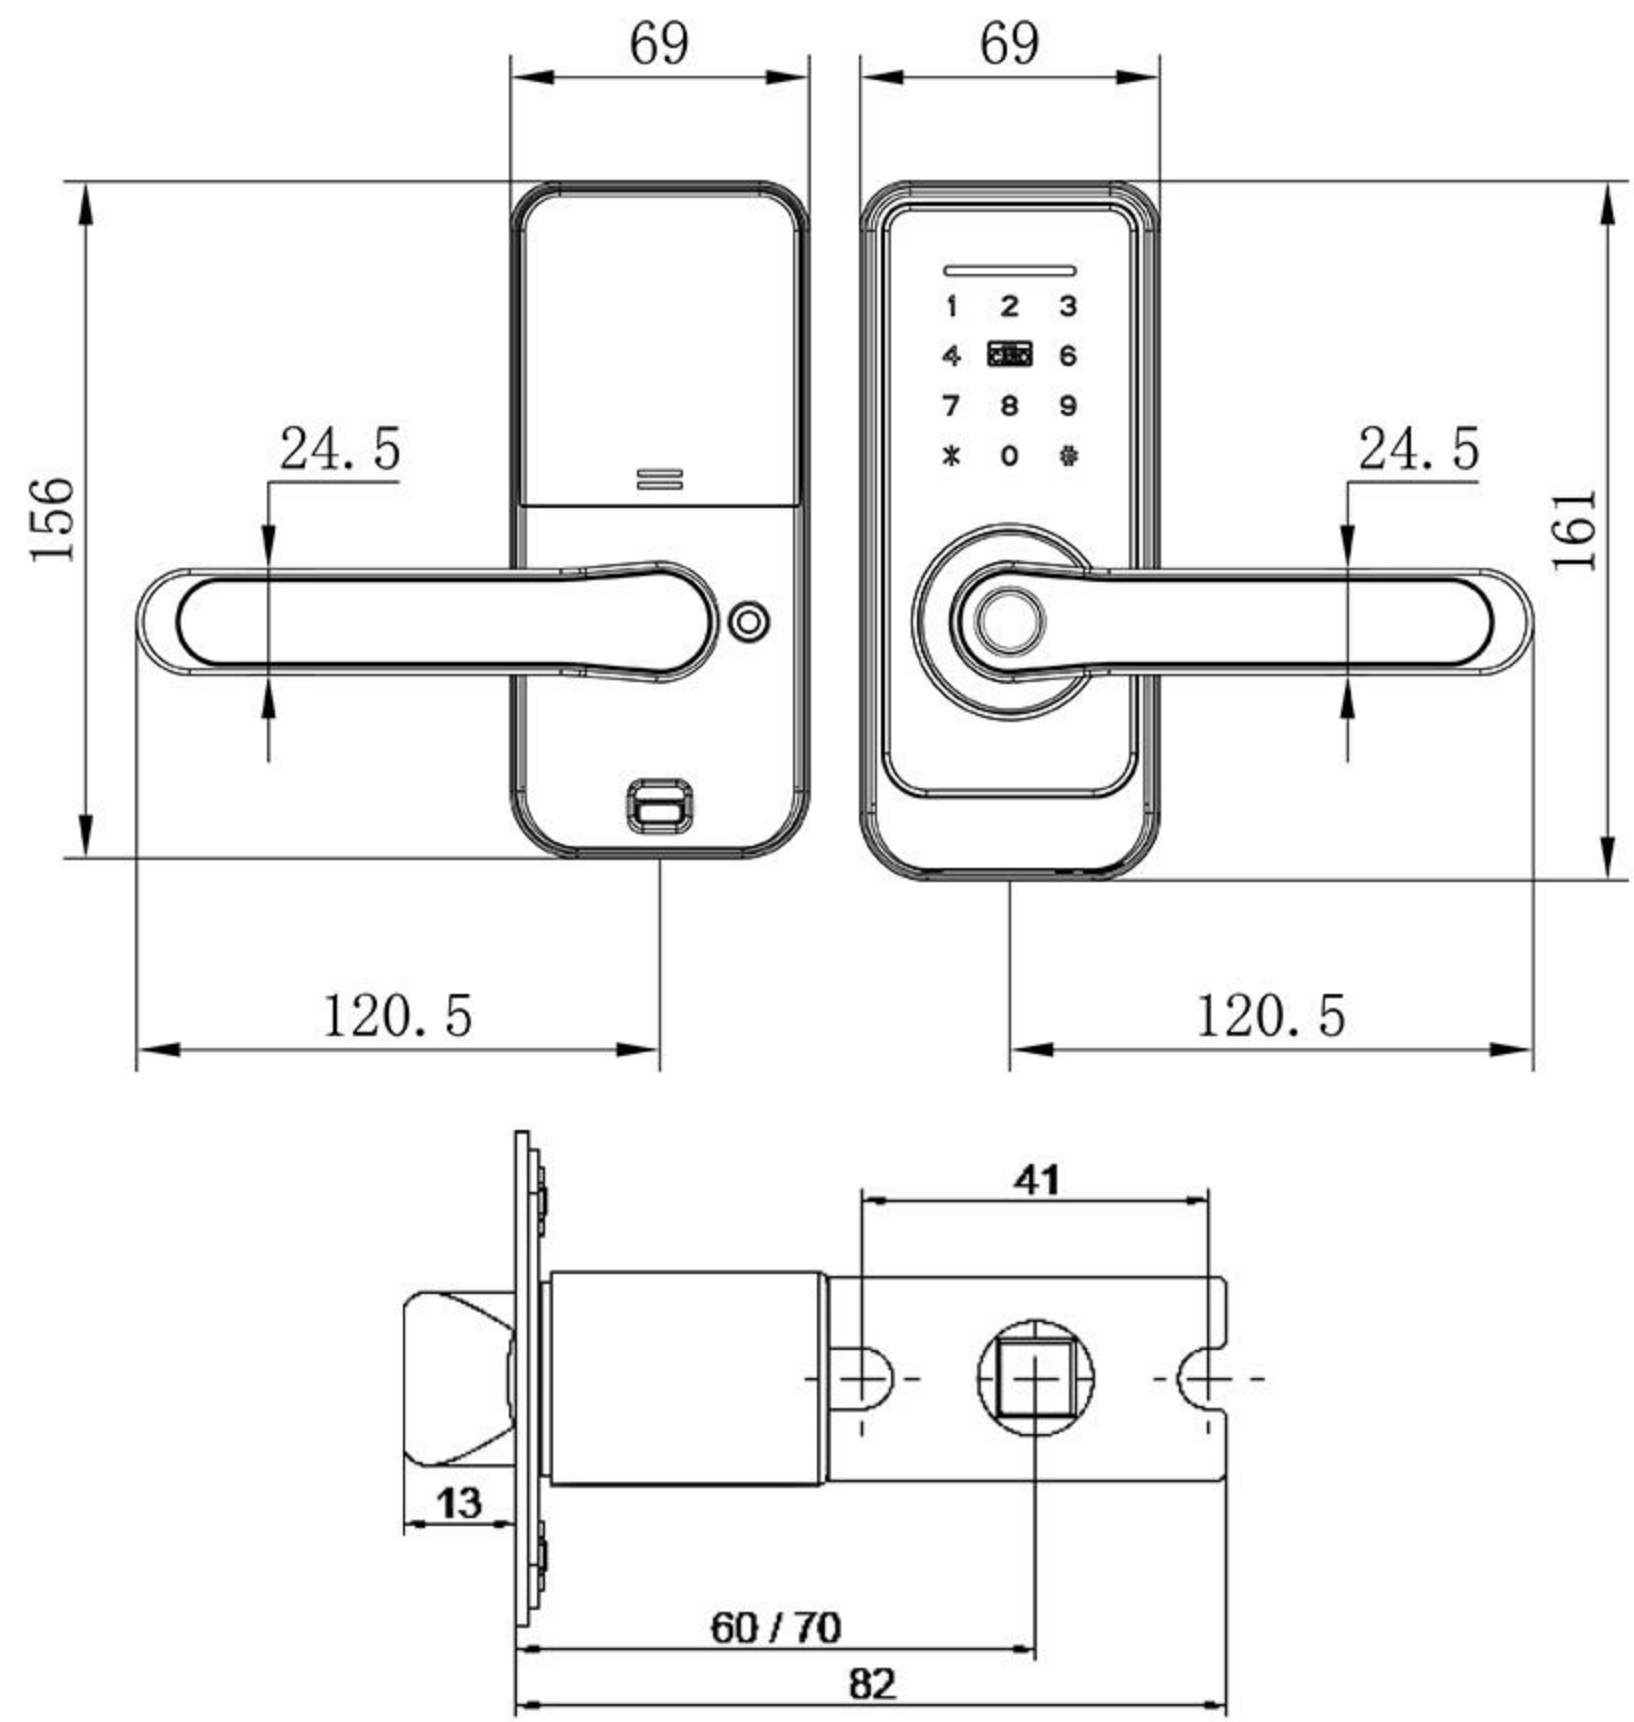

Cylindrical Latch

Main Features

- There are Mobile key, PIN code, fingerprint, RFID card, manual key override for your choice.
- You can enter random numbers prior or after to the right code when there is a chance to expose to others.
- Low battery indication to remind you to replace new batteries.
- For emergency, it can be also unlocked by a manual key override.
- The lock can be powered with a Type-C power back-up when you forget to replace the batteries.
- 5050 mortise are available for the lock.
- More than 100,000 life cycles.
- Allow users to configure and unlock the lock via mobile phone.
- Optional gateway, the user can remotely unlocking, view and calibrate the time of the lock, read the unlocking record, remotely configure the lock.