

K8


Smart Lock




TTLock



Mortise Compatibility

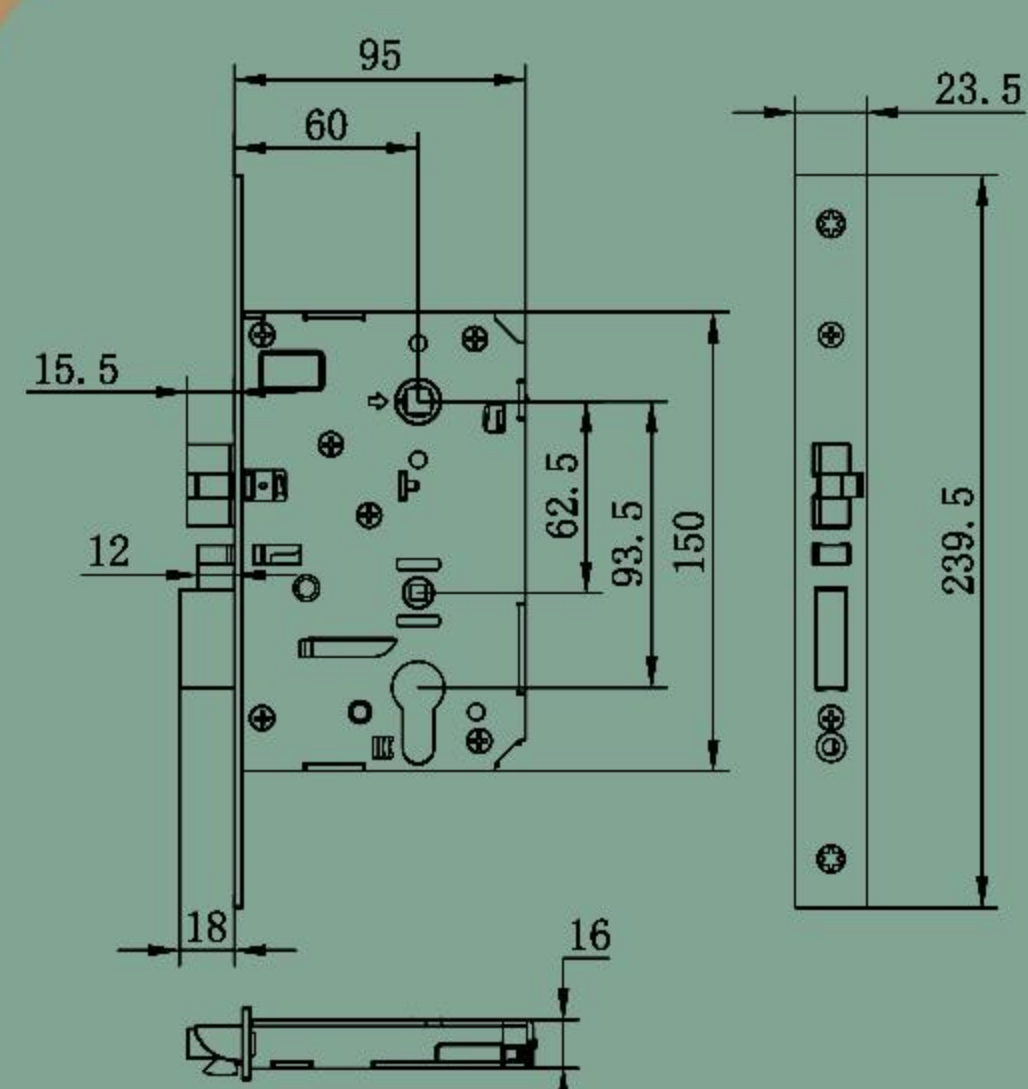

Euro

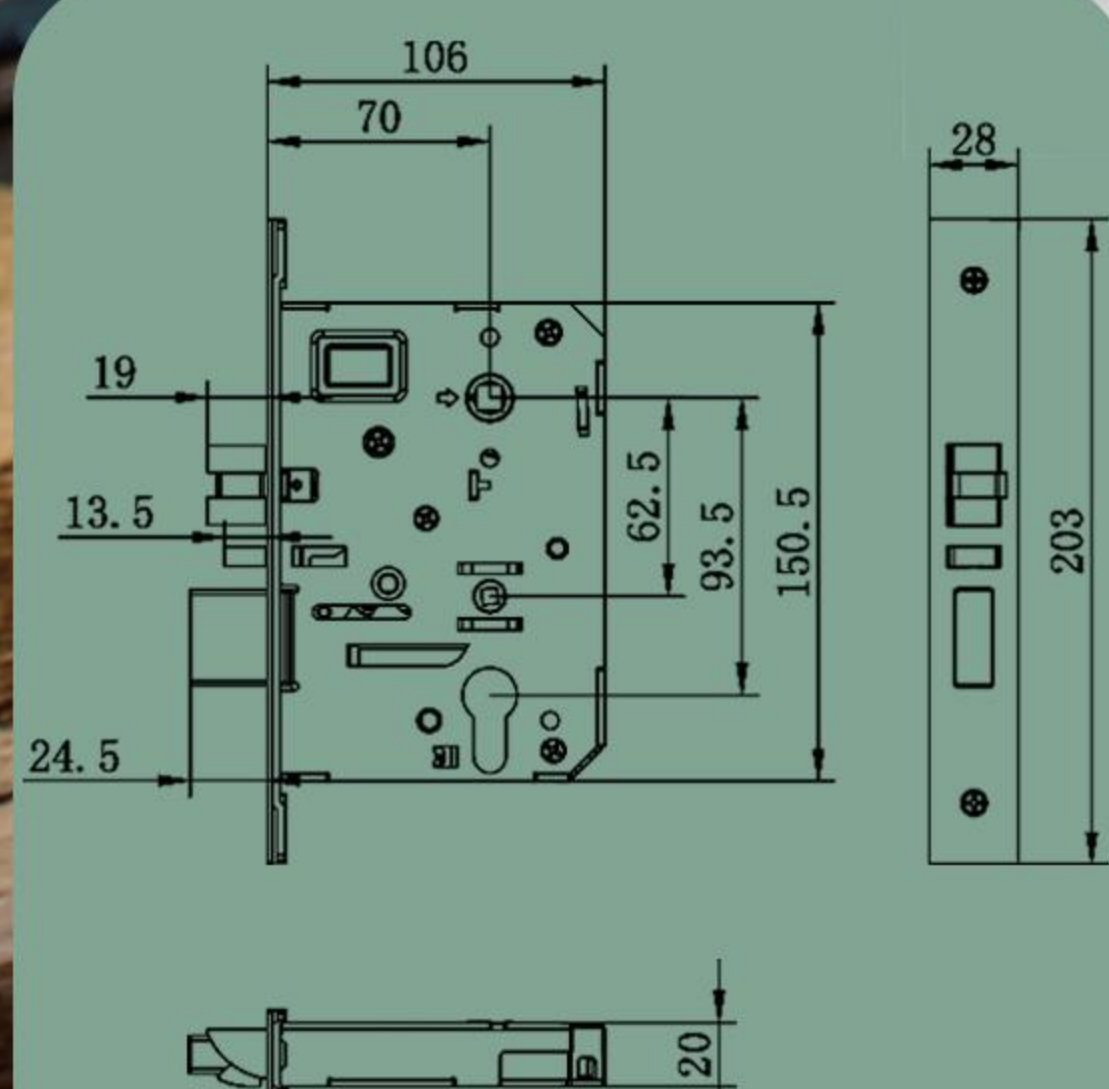

ANSI

Product Overview



Front Body




Rear Body

Specifications

Door Thickness	35-55mm
Mortise Compatibility	Euro Mortise ANSI Mortise
Pin Code	150 Groups
RFID Card	1000 pcs
Battery	4X1.5VAA alkaine batteries
Opeartion Temp	-10-55℃
Opeartion Humidity	20%-93%RH

Product Dimensions

Unit: mm

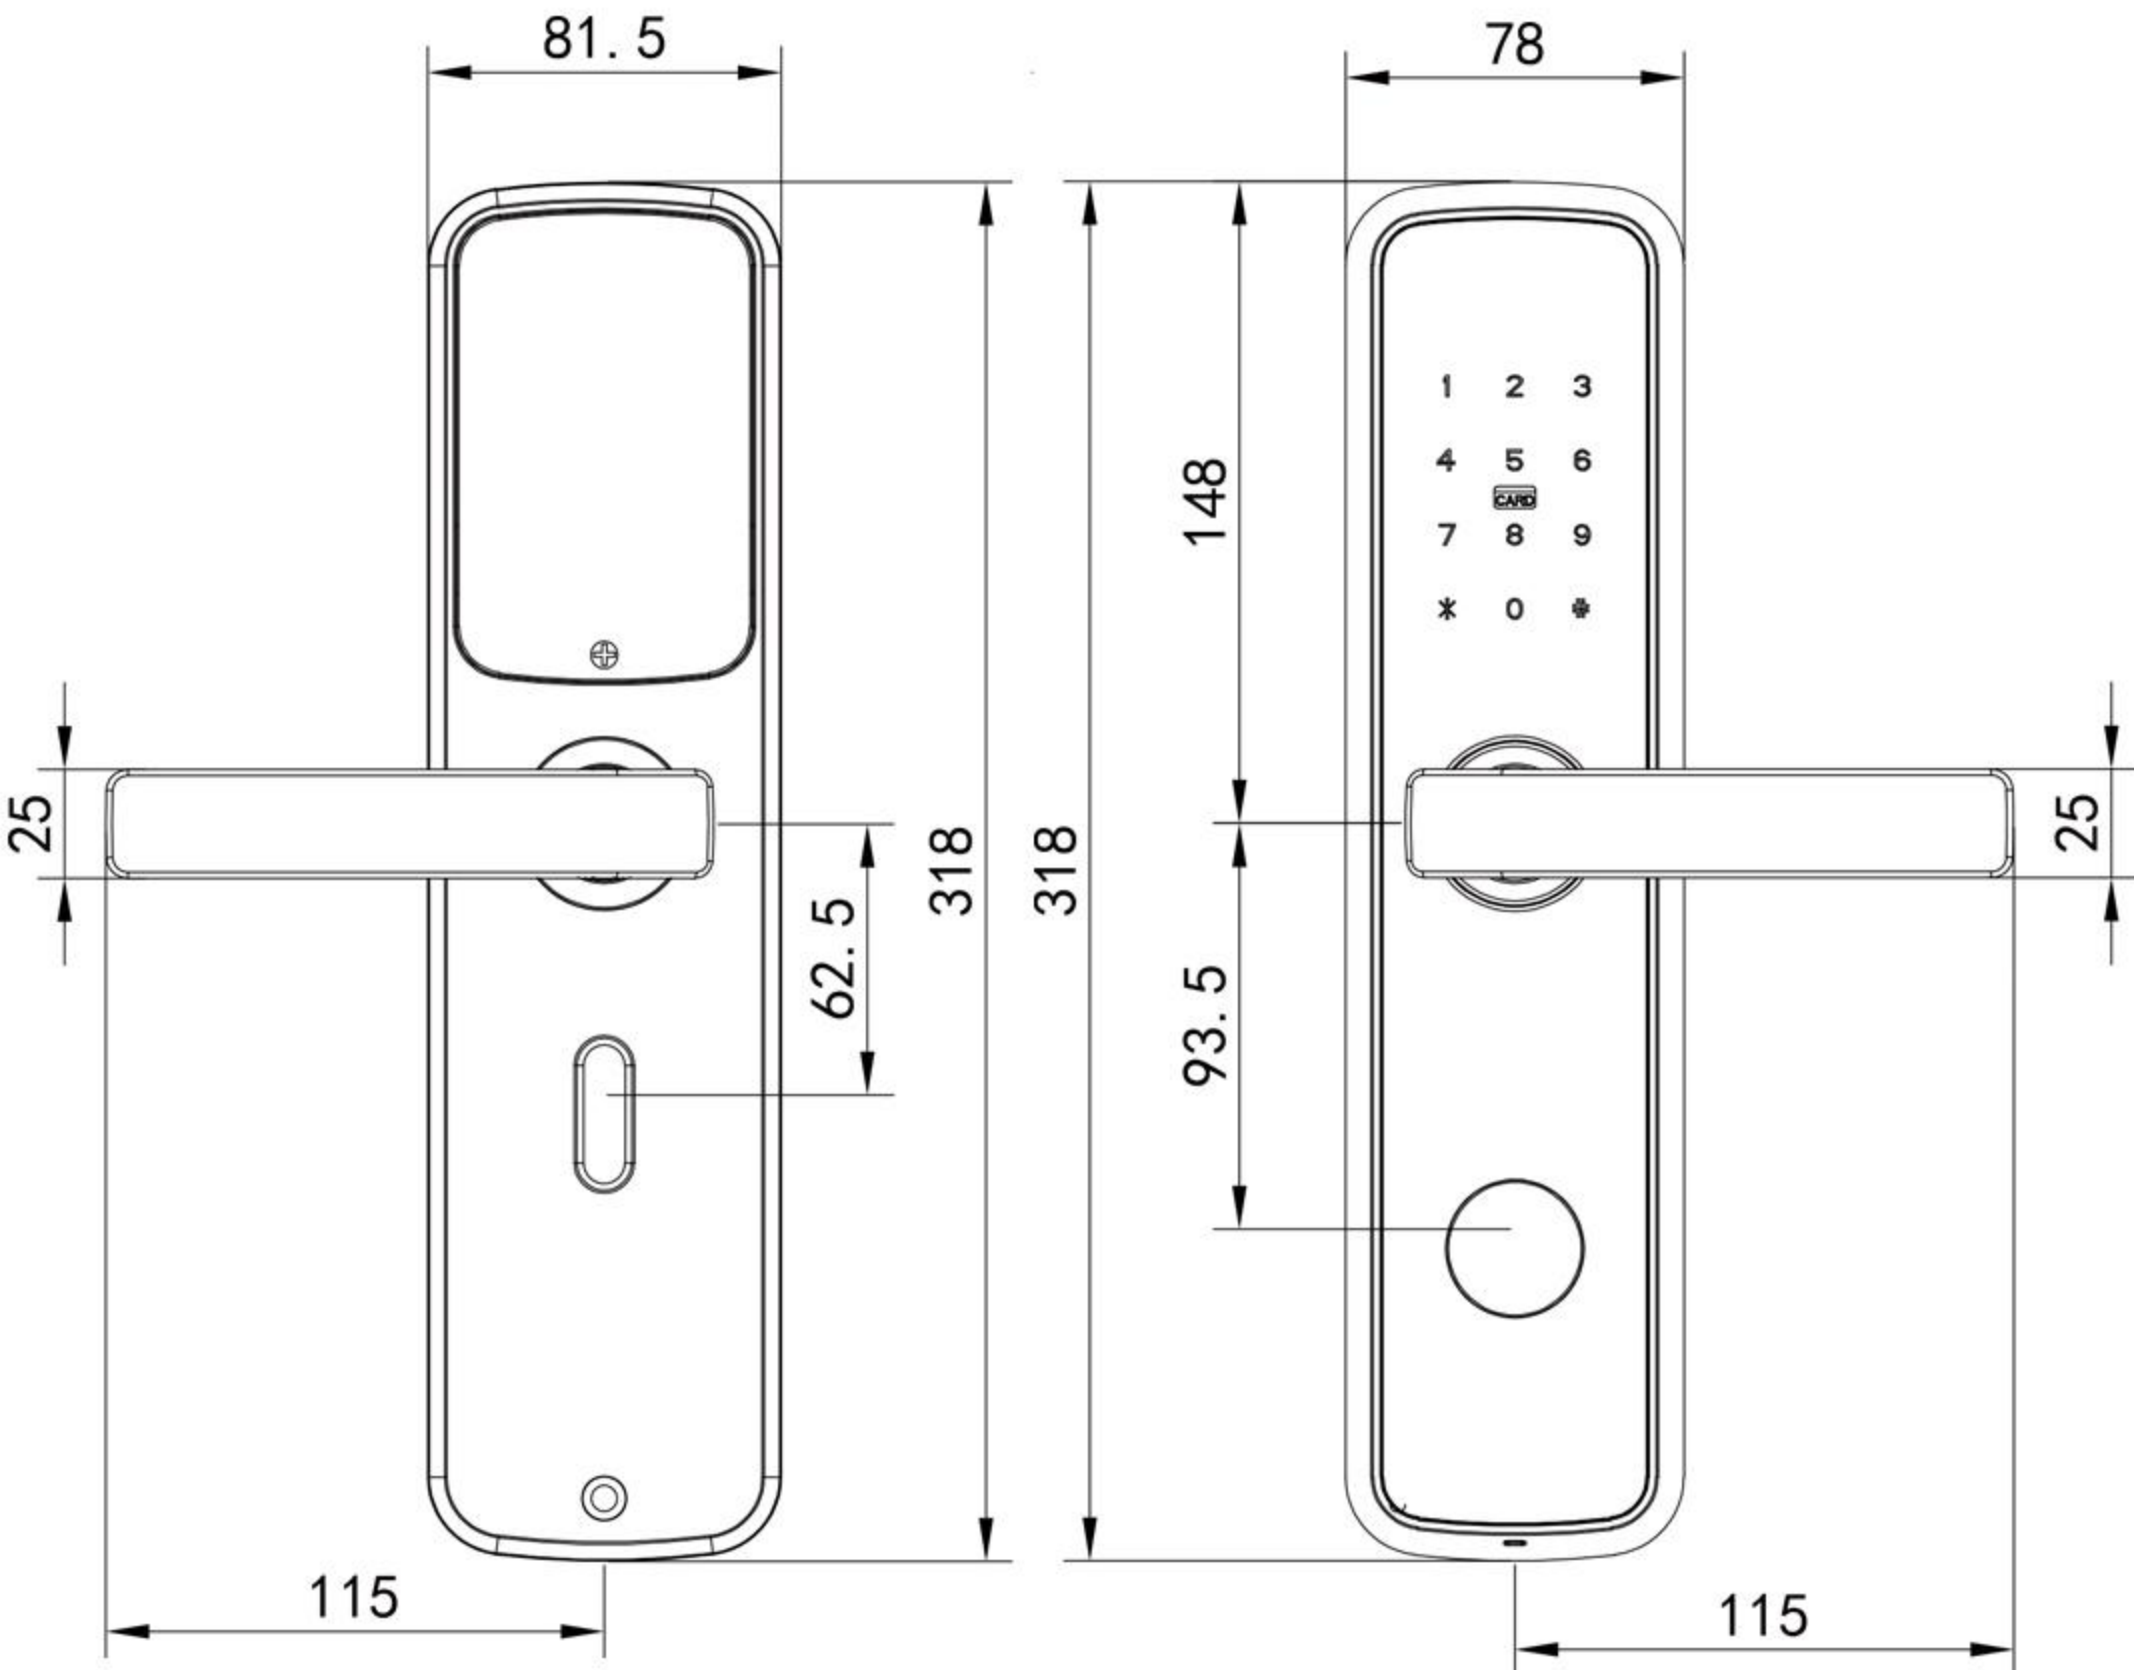

Main Features

- There are Mobile key, PIN code,, RFID card.manual key override for your choice.
- You can enter random numbers prior or after to the right code when there is a chance to expose to others.
- Low battery indication to remind you to replace new batteries.
- For emergency, it can be also unlocked by a manual key override.
- The lock can be powered with a Type-C power back-up when you forget to replace the batteries.
- Euro mortise and ANSI mortise are available for the lock.
- More than 100,000 life cycles.
- Allow users to configure and unlock the lock via mobile phone.
- Optional gateway, the user can remotely unlocking, view and calibrate the time of the lock, read the unlocking record, remotely configure the lock.